




AUTOMATIC TYRE CHANGER

SA3500A

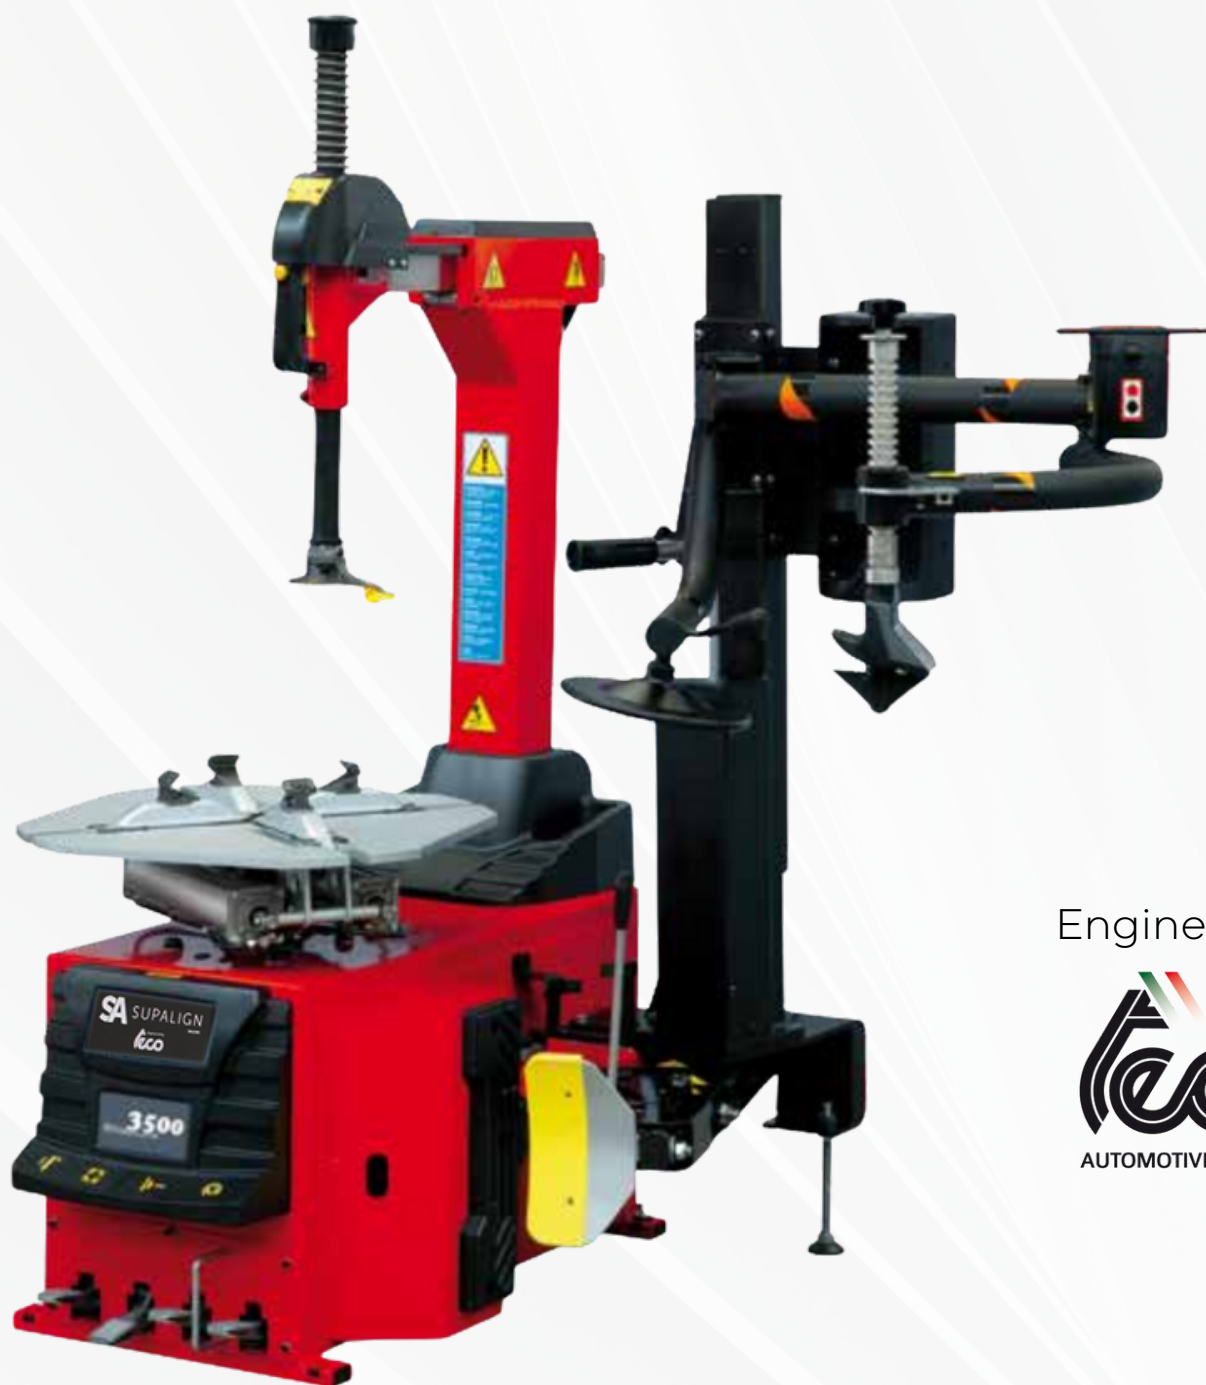

Engineered By



Automatic tyre changer for cars, lightweight transport vehicles and motor vehicles

JHM Butt & Co Limited, Brunel Close, Brunel Industrial Estate, Harworth, DN11 8QA



Tel: 01302 710868



Website: www.jhmbuttco.com



Email: info@jhmbuttco.com


Automatic Tyre Changer

TECHNICAL DATA

OUTSIDE CLAMP	10" - 21"
INSIDE CLAMP	12" - 23"
MAX. WHEEL DIAMETER	1040 mm
TIRE WIDTH BEAD-BREAKER OPENING	3" - 12"
BEAD-BREAKING POWER	320 mm
WORKING AIR PRESSURE	15000 N 8 - 10 bar
MOTOR POWER	200/230V - 1ph - 1.1 kW 100/115V - 1ph - 1.1 kW
CHUCK ROTATION SPEED	7 rpm - 2V 6.5 -13 rpm
NOISE LEVEL RUNNING	<70 dB
NET WEIGHT MACHINE	246 kg
GROSS WEIGHT MACHINE	285 kg
MAX DIMENSION IMBALLAGE (LXPXH)	1130x910x1010 mm
FOR 40" CONTAINER	36 pcs

OPTIONAL ACCESSORIES

- **CT-S-0200000** - Plastic bead pressing clamp
- **CT-S-0110000** - Demount head quick change tool
- **CT-S-0310000** - Plastic demount head assy (for tilt back model use)
- **C-21-8000100** - Motorcycle demount head
- **C-M-0200000A** - Motorcycle adaptor (hand roller style), for STANDARD jaw system use
- **CT-S-0600000** - Wheel rotation support WRSB
- **8-11900271** - Lever and shoe plastic protection kit
- **8-11900270** - Plastic protection kit
- **8-11120075** - Wheel lifter FWL 65

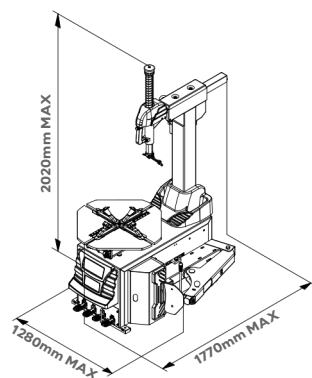

ACCESSORIES



STANDARD



CT-S-0200000



CT-S-0110000




C-TS-0310000




C-21-8000100



C-M-0200000A



C-TS-0600000



8-11900271



8-11900270



8-11120075

OPTIONAL

*For other optional accessories, refer to separate catalogue