

S-A-TUSB

5-A-T


It isn't always just a matter of size

The **S-A-T USB** was designed as a time and money-saving method of testing shock absorbers whilst still fitted to a vehicle. This precision tool that is based upon ultrasonic distance-measuring technology has a home in every workshop and its optimal ease of use and operation mean that is easy to get used to.

Increased turnover, thanks to safety

Defective shock absorbers have no chance with **S-A-T USB** and your customers benefit from greater safety, whilst your workshop increases its sales by replacing defective shock absorbers.

Our aim is your success

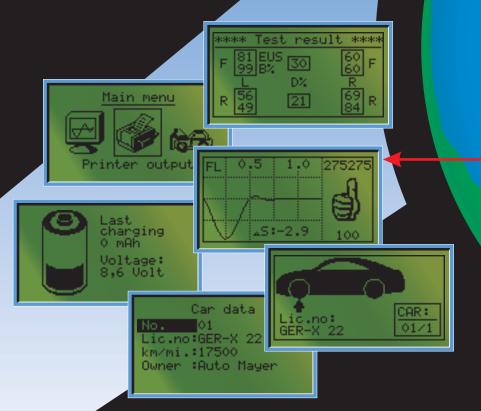

The decisive factor


The S-A-T USB is supplied with a comprehensive package of PC software:

- all settings can be changed by the click of a mouse
- text is entered comfortably by using the keyboard
- measurements are prepared on the PC
- simple method of data exchange between PC and **S-A-T USB**
- up to 25 data records can be processed simultaneously
- automatic allocation of imported test results
- clear archive of vehicle, measurement and customer information
- print-out of results on A4 paper carrying your company's letterhead
- import facility for existing customer databases
- Online update function, meaning that system is always up to date

The technology makes it all possible

No connection to mains electricity is needed, which means that you can test shock absorbers either inside or outside the workshop. The **S-A-T USB** is controlled by a powerful 32-bit processor and is also fitted with an LCD display, a rapid and robust thermoprinting system and a USB interface. The collected data can therefore be analysed, evaluated, displayed in the form of graphs and printed, either with or without the support of a PC. Easy-to-understand measurement reports then provide your customers with all of the evidence they need.

An investment with prospects



Scope of delivery

- Case
- S-A-T USB Shock Absorber Tester
- EUS-40 external ultrasonic transmitter
- Power supply pack
- 500 sheets of thermal paper
- 1.8 m USB data cable

Win98SE/W2K/XP/X64 compatible

database software





Dimensions of basic device: 15.7 x 10.0 x 8.5 cm

Dimensions of case: $40.0 \times 11.0 \times 30.0 \text{ cm}$

Weight of basic device: 720 g

Weight including case and accessories: 2.65 kg Electricity supply during battery operation: 8.4V

Electricity supply during mains operation: 100-240V ~50-60Hz

Display: 128 x 64 pixels

Thermal printer: line printer 288 dpl

RoHS-compliant in accordance with Directive 2002/95/EC

The Manufacturer reserves the right to make changes to the technical specifications



Contact

JHM Butt & Co Ltd

Tel: 01302 710868 Fax: 01302 719481

Email: info@jhmbuttco.com

Web: www.buttsequipment.com