

**Solutions for diesel,
oil, AdBlue® & water tanks**



CTS TANK ALARM RANGE

Multi & Single Zone Level Alerts

> High Level

> Low Level

> Bund Alert

ABOUT US & OUR CAREFULLY SELECTED SUPPLIERS....

Centre Tank Services are leading trade distributors of fuel dispensing, storage tank, AdBlue® and lubrication equipment. Over the last 30 years, CTS have built a trusted reputation within the market for quality products, excellent stockholding and great customer service.

As well as our industry leading, inhouse designed tank alarm range, CTS are also stockists of many large brands of fluid handling equipment. We are the UK exclusive importers of Italian manufacturer Piusi and US made Husky nozzles.



WHY CHOOSE CTS AS YOUR SUPPLIER....

We have customers in over 75 countries worldwide, with a client base spanning every continent. Our core customer base is made up of resellers and OEMs including tank manufacturers, forecourt engineers, agricultural merchants, hydraulic companies, fuel distributors, heating and plumbing merchants and general industrial suppliers to name a few. Below is just a snippet of what you can expect from Centre Tank Services' customer support and service:

- ✓ A competitive reseller pricing structure and access to special prices.
- ✓ Goods available for immediate dispatch from our 14,000 sq ft. warehouse.
- ✓ Marketing and sales support including branded promotional literature.
- ✓ Technical pre-sale product selection advice and post sale product support.
- ✓ 30 years of industry experience in fluid handling in UK and international markets.
- ✓ Bespoke designed pump kits for your tank requirements.
- ✓ Designated account manager for handling any out of usual day to day business.

QUALITY STANDARDS ARE ESSENTIAL TO OUR BUSINESS....

Quality standards are essential to our business and we set very high standards in the way that we operate. Centre Tank Services have achieved full ISO 9001 accreditation following the audit of our internal systems and procedures.

We are also members of OFTEC, the Federation of Petroleum Supplies, the Petroleum Equipment Installers & Maintenance Federation and the Association for Petroleum and Explosives Administration.




THE ORIGINAL CTS FUEL TANK ALARM

Where it all started....

Centre Tank Services have been suppliers to the fluid handling and fuel storage industry for almost 30 years. Designed in-house using our specialist expertise in the fuel storage market's requirements, the CTS multi-zone tank alarm was originally developed for use on commercial diesel tanks to accurately detect and alert the user of the fuel reaching the set high or low level.

The CTS tank alarm is now a leading solution for level alert amongst fuel tank manufacturers and engineers within the industry, and is well recognised on refuelling tanks used in the haulage, construction and agricultural markets.

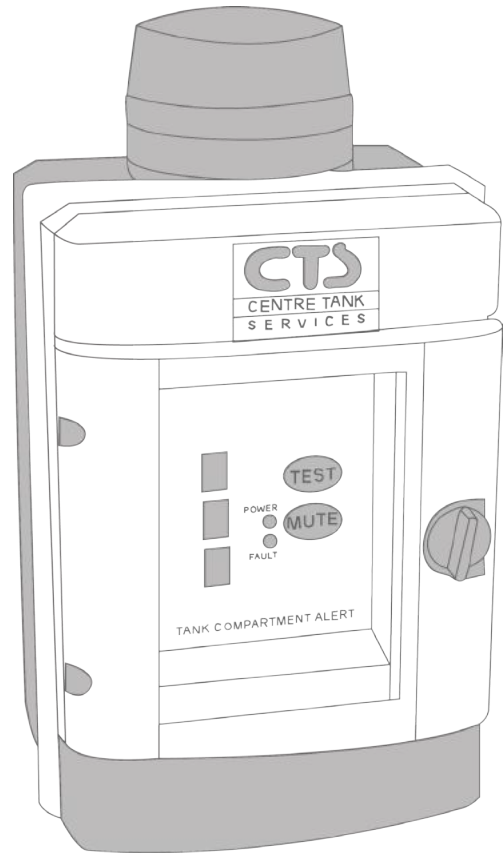

INDUSTRIES & APPLICATIONS

More than just for diesel....

Whilst commercial diesel refuelling tanks were the initial purpose for which the CTS tank level alarms were developed, the applications they are now used for are unlimited.

Provided that the probe/level switch is compatible with the fluid in question, then the CTS alarm will be a suitable solution for alerting the user that the set level zone has been activated on almost any type of fluid storage tank.

APPLICATIONS WE SUPPLY TANK ALARMS FOR INCLUDE:

- › Diesel refuelling
- › Generator feed tanks
- › Water tanks
- › Waste oil containers
- › Chemical storage
- › AdBlue® tanks
- › And more...



CTS Tank Alarms / Alarm Probes

Single Probe



Double Probe



Single/Double

PROBES

See [pages 4-7](#) for alarm boxes

RELATED PRODUCTS



Fuel Tank Alarm Probes

The CTS fuel tank alarm probes are designed for use with the industry renowned CTS alarms to accurately detect and alert the user of one, a combination, or all of the following tank states:

- › **High fuel level** to help avoid further filling of the tank and an overspill from occurring
- › **Low fuel level** to indicate that stock is running out and a fuel delivery needs to be ordered
- › **Bund alert** to warn that fluid is present in the bund compartment which may indicate a leak or the ingress of rain water
- › As standard, these probes are designed for installation onto steel tanks, for plastic tanks the plastic tank kit is also required

| Code | Description | Alerts | Construction | Cable | Temp | Connection | Fluids |
|------------------|-------------------------------------|---------------------|-------------------------------|--------|-------------|----------------------|-------------------|
| SWS1035 | Single Fuel Tank Alarm Probe | High or Low or Bund | Buna, nylon & stainless steel | 5m PVC | -20°C/+80°C | 1 ½" F BSP Brass Cap | D O |
| SWS1035/2 | Double Fuel Tank Alarm Probe | High & Low | Buna, nylon & stainless steel | 5m PVC | -20°C/+80°C | 1 ½" F BSP Brass Cap | D O |
| SWS1036 | Plastic Tank Kit - For Single Probe | | | | | | AF |
| SWS1037 | Plastic Tank Kit - For Double Probe | | | | | | AF |
| SWS1009 | Alarm Cable Per Metre | | | 1m PVC | | | AF |

Water & Chemical

Oil Drum



High viscosity

Single

PROBES

See [page 4-7](#) for alarm boxes

RELATED PRODUCTS



Alarm Probes for Other Fluids

Water & Chemical Probe

- › Single probe for high or low level alerts on water & chemical tanks
- › Please note: Chemical compatability should be checked

High Viscosity Probe

- › Single probe for high or low level alerts on tanks containing thick fluids and heavy fuel oils
- › For high level also suitable for liquids that crystallise e.g. AdBlue®

Oil Drum Probe

- › Single probe for alerting of a high oil level in a drum
- › Designed specifically for waste oil storage systems when the user needs to be aware when the container needs to be emptied

| Code | Description | Alerts | Construction | Cable | Temp | Connection | Fluids |
|----------------|-------------------------------------|-------------|---------------------------|--------|-------------|-----------------------------|--------------------|
| SWS1040 | Water & Chemical Probe | High or Low | Polyprop body & PE weight | 5m PVC | -20°C/+80°C | 1 ½" F BSP Polyethylene Cap | W C |
| SWS1038 | High Viscosity Probe | High or Low | Polyprop | 5m PVC | 0°C/+60°C | 1 ½" F BSP Brass Cap | O AB |
| SWS1039 | Oil Drum Probe | High | Buna, nylon & polyprop | 5m PVC | -20°C/+80°C | ¾" M BSPT Steel Drum | O |
| SWS1036 | Plastic Tank Kit - For Single Probe | | | | | | AF |
| SWS1037 | Plastic Tank Kit - For Double Probe | | | | | | AF |
| SWS1009 | Alarm Cable Per Metre | | | 1m PVC | | | AF |

ANY
FLUID

Mains Multi-Zone Tank Alarm

- › Mains multi-channel tank alarm for alerting of a combination or all of the following tank states: high, low and/or bund
- › 90db sounder & flashing orange strobe to warn of a problem
- › Zone in question lights up on the screen to clearly indicate the activated tank state
- › Test & alarm mute functions
- › Automatically reversed float logic for low zones
- › Weatherproof IP55 enclosure
- › Standard box with multiple input voltages 110v/230v, 12v/24v DC
- › Option with relays to connect to external equipment e.g. other alarms or building management systems for remote monitoring
- › Version with relays can also be used to control the pump operation on a day tank e.g. to turn it on when tank contents are low until the high level is reached
- › **Please note: Probes are purchased seperately, please select the ones you require from the opposite page's table**

Multi

ZONES

Electric

POWER

See [page 3](#) for probes

RELATED PRODUCTS



| Code | Description | V | Relays | Zones | Fluids |
|---------|--|-----------------|--------|-----------------------|--------|
| SWS2000 | Mains Multi-Compartment Alarm Box | 110/230/12v/24v | | Multi - High/Low/Bund | AF |
| SWS2001 | Mains Multi-Compartment Alarm Box c/w Relays | 110/230/12v/24v | 3 | Multi - High/Low/Bund | AF |

ANY
FLUID

Battery Multi-Zone Tank Alarm

- › Battery multi-channel tank alarm for alerting of a combination or all of the following tank states: high, low and/or bund
- › Designed for isolated or portable installations where mains power is unavailable
- › 90db sounder and flashing red LED to warn of a problem
- › Zone in question lights up on the screen to clearly indicate the activated tank state
- › Test & alarm mute functions
- › Low battery warning - will sound a single beep every minute
- › Automatically reversed float logic for low zones
- › Weatherproof IP55 enclosure
- › Option with relays to connect to external equipment e.g. other alarms or building management systems for remote monitoring
- › **Please note: Probes are purchased seperately, please select the ones you require from the opposite page's table**

Multi

ZONES

Battery

POWER

See [page 3](#) for probes

RELATED PRODUCTS



| Code | Description | Batteries | Relays | Zones | Fluids |
|---------|--|-----------|--------|-----------------------|--------|
| SWS1000 | Battery Multi-Compartment Alarm Box | 6 x AA | | Multi - High/Low/Bund | AF |
| SWS1001 | Battery Multi-Compartment Alarm Box c/w Relays | 6 x AA | 3 | Multi - High/Low/Bund | AF |

Sophisticated tank monitoring when only one alert is required with the Single Channel Alarm

FEATURED



Single

ZONES

Mains/ Battery

POWER

See [page 3](#) for
other fluid probes

RELATED PRODUCTS

CTS Single Channel Tank Alarm

Designed for when only one alert is required, the CTS Single Channel Tank Alarm is a more sophisticated and flexible alternative to the Economy tank alarm models on the opposite page.

It can be used to identify and warn of either a high level, low level or fluid in the bund. Once activated the alarm will sound as well as display the name of the activated tank state on the descriptive red LED text display, so that the user can clearly see what the problem is.

Features...

- Single zone tank alarm to warn of either a high level, low level or fluid in the bund
- 90db sounder & descriptive red LED text display to clearly warn of the activated tank state
- Test & alarm mute functions
- Automatically reversed float logic for low zones so that it is ready for use again once the fluid level has increased
- Weatherproof IP55 enclosure with 4 external mounting lugs
- Mains, battery & mains with battery back up versions available
- Battery version has low battery warning for indication that it needs to be replaced
- Mains version c/w relay connecting to external equipment e.g. another alarm or BMS for remote monitoring
- Available with 5m fuel probe or without for use with other fluids (select other fluid probe from page 3)

Using the single channel alarm as a remote warning device

- The mains powered versions of the single channel alarm come with a relay to allow you to connect it to a single relay on another alarm as a remote warning device.
- The second alarm can be positioned 100m away from the other, inside the office for example, meaning that you don't have to be in sight/ear shot of the tank to be alerted to the problem.
- The two alarms will act independently from one another meaning that if one of them is muted, the other will continue to sound until it is muted or the zone is unactivated i.e. the problem is solved.

| Code | Description | Power | Probe | Relay | Zones | Fluids |
|---------|---|-----------------|-------|-------|------------------------------|--------|
| SWS2002 | Mains Single Channel Tank Alarm c/w Probe | 230v | o | o | Single - High or Low or Bund | D O |
| SWS1011 | Battery Single Channel Tank Alarm c/w Probe | 1 x PP3 Battery | o | | Single - High or Low or Bund | D O |
| SWS2003 | Mains Single Channel Tank Alarm Battery Back-up c/w Probe | 230v | o | o | Single - High or Low or Bund | D O |
| SWS2004 | Mains Single Channel Tank Alarm Only | 230v | | o | Single - High or Low or Bund | AF |
| SWS1021 | Battery Single Channel Tank Alarm Only | 1 x PP3 Battery | | | Single - High or Low or Bund | AF |
| SWS2007 | Mains Single Channel Tank Alarm Battery Back-up Only | 230v | | o | Single - High or Low or Bund | AF |
| SWS1009 | Alarm Cable Per Metre for Remote Installation | | | | | AF |

ANY
FLUID

Economy Tank Level Alarm

- › An economical, entry level tank alarm solution if only one level alert is required
- › Can be used to indicate that the tank level has reached either a high or low state depending upon requirements
- › Battery powered for use on portable installations or sites where mains power is inaccessible
- › Flashing red LED & 90db alarm will sound to alert the user that the set level has been reached
- › Test & alarm mute functions
- › Weatherproof IP55 enclosure with 4 external mounting lugs
- › Simple operation means battery will last in excess of 72 hours in full alarm mode, making it ideal for sites not always manned
- › Version available with 5m diesel/oil probe and version without for use with other fluids **(select other fluid probe from page 3)**
- › c/w 3 cut to size stickers to name the LED – 2 labelled high & low and 1 blank to name it something else with permanent marker

Single

ZONES

Battery

POWER

See [page 3](#) for other fluid probes

RELATED PRODUCTS



| Code | Description | Battery | Probe | Zones | Fluids |
|---------|------------------------------------|---------|-------|----------------------|--|
| SWS1024 | Economy Tank Level Alarm c/w Probe | 1 x PP3 | 0 | Single - High or Low | D O |
| SWS1022 | Economy Tank Level Alarm Only | 1 x PP3 | | Single - High or Low | AF |



Economy Bund Alarm

- › An economical, entry level tank alarm c/w 5m single probe to alert of presence of fluid in the bund
- › Simple & cost effective solution if only bund alert is required
- › Used to indicate either the inner tank leaking into the bund or excess rain water and debris that has built up
- › Battery powered for use on portable installations or sites where mains power is inaccessible
- › Flashing red LED & 90db alarm will sound to alert the user to a problem
- › Test & alarm mute functions
- › Weatherproof IP55 enclosure with 4 external mounting lugs
- › Simple operation means battery will last in excess of 72 hours in full alarm mode, making it ideal for sites not always manned
- › Suitable for use with diesel and light oils

Single

ZONES

Battery

POWER

See [page 3](#) for other fluid probes

RELATED PRODUCTS



| Code | Description | Battery | Probe | Zones | Fluids |
|---------|--------------------|---------|-------|---------------|--|
| SWS1019 | Economy Bund Alarm | 1 x PP3 | 0 | Single - Bund | D O |

PUMPS

FMS

METERS

HOSES

NOZZLES

ALARMS

GAUGES

FILTERS

FILL & VENT

VALVES

FITTINGS

TOOLS

CTS Tank Alarms / Single Channel Alarms



Single

ZONES

Battery

POWER

See [page 3](#) for other fluid probes

RELATED PRODUCTS



AdBlue® Tank Alarm

- › An economical, entry level tank alarm solution c/w 5m probe for use on an AdBlue® tank
- › Overfill version to indicate that the tank has reached the set high level & bund version to indicate the presence of fluid in the bund
- › Battery powered for use on portable installations or sites where mains power is inaccessible
- › Flashing red LED & 90db alarm will sound to alert the user to a problem
- › Test & alarm mute functions
- › Weatherproof IP55 enclosure with 4 external mounting lugs
- › Simple operation means battery will last in excess of 72 hours in full alarm mode, making it ideal for sites not always manned
- › c/w fittings to make it suitable for either plastic or steel tanks
- › High level alarm has an encapsulated probe, ensuring reliable cut off even when crystallised

| Code | Description | Battery | Probe | Zones | Fluids |
|---------|---|---------|-------|---------------|--------|
| SWS3021 | AdBlue® Bund Alarm c/w Probe | 1 x PP3 | 0 | Single - Bund | AB W C |
| SWS3022 | AdBlue® High Level/Overfill Alarm c/w Probe | 1 x PP3 | 0 | Single - High | AB 0 |



Single

ZONES

Battery

POWER

See [page 3](#) for other fluid probes

RELATED PRODUCTS



ATEX Approved Tank Alarm

- › ATEX approved tank alarm for alerting of a high fluid level or fluid within the bund which may indicate a leak or rain water ingress
- › Battery powered for use on portable installations or sites where mains power is inaccessible
- › Flashing red LED & 95db alarm will sound to alert the user
- › Siren will sound continuously for 120 seconds followed by a periodic beep for 60 minutes
- › Alarm automatically cancels when the zone is deactivated
- › Test battery, test alarm & alarm cancel functions
- › IP65 metal enclosure
- › ATEX approved for Zone 1 II2G Ex ia IIB T4 Gb
- › Version with 5m probe for use with diesel, kerosene and JET A1 with maximum 9m cable
- › Version without probe for use with other fluids such as petrol using a third party ATEX probe with solid stem

| Code | Description | Battery | Probe | Zones | Fluids |
|---------|---------------------------|---------|-------|-----------------------|--------|
| SWS2006 | ATEX Tank Alarm c/w Probe | AAA | 0 | Single - High or Bund | D K J |
| SWS3020 | ATEX Tank Alarm Only | AAA | | Single - High or Bund | AF * |

*Depending upon compatability of third party probe used

ANY
FLUID

GSM Text Alerter

- › Designed for the remote monitoring of low or high level should the user wish to know when the tank needs filling/emptying
- › The unit allows 4 trigger inputs to be set, which upon activation send a text to alert the user of the tank level
- › A customised 30 character SMS can be sent to up to 8 mobile phones e.g. "Back yard fuel tank - low"
- › Can detect a sudden drop in fuel if half full and low level texts are received in short succession indicating a potential theft or leak
- › Weatherproof IP55 rated enclosure
- › Version with diesel/oil probe and version without probes for connecting to another device such as a fuel tank alarm or for use with other fluids **(select other fluid probe from page 3)**
- › **Please note: A mobile phone & GSM SIM card are required to program and use the unit**

Multi

ZONES

Mains

POWER

See [page 3](#) for other fluid probes

RELATED PRODUCTS



| Code | Description | V | Probe | Zones | Fluids |
|---------|-----------------------------------|---------|-------|-------------------|-------------------------------|
| CTS6000 | GSM Text Alerter c/w Double Probe | 110-230 | 0 | Double - High/Low | D O |
| CTS6001 | GSM Text Alerter Box Only | 110-230 | | Double - High/Low | AF |

ANY
FLUID

Apollo Smart Tank Gauge

- › Easy to retrofit, ultrasonic tank contents gauge originally designed for domestic heating oil tanks but suitable for use with many
- › Transmitter fits on top of the tank & the receiver plugs into a wall socket via a transformer to conveniently display the tank level
- › Receiver has a digital display litre & bar graph reading – 10% tank height per bar
- › Transmitter has a local bar graph display for monitoring the tank reading locally as well as remotely
- › Audible low level alarm & anti-theft alarm which sounds if the fluid level drops suddenly
- › Monitors fluid consumption levels in litres & cost by day, week, month or year & the number of days you have until tank is empty
- › Provides room temperature reading & CO2 emission data
- › Transmitter to receiver range is 150m depending on obstacles
- › Receiver: 150-250v, 50/60Hz
- › Transmitter: 3v lithium battery (approx. 10 years)



Bar/Litres

READING

Two Part

TYPE



| Code | Description | Reading Type | Tank Height (mm) | Local Display | Remote Display | Tank Fitting | Working Temp | Fluids |
|------------|--------------------|--------------------|------------------|---------------|----------------|--------------|--------------|--------|
| APUOLSMART | Apollo Smart Gauge | Bar Graph & Litres | 500-3000 | 0 | 0 | 32mm | -10°C/+60°C | AF |

PUMPS

FMS

METERS

HOSES

NOZZLES

ALARMS

GAUGES

FILTERS

FILL & VENT

VALVES

FITTINGS

TOOLS

Centre Tank Services Ltd / Ordering & Delivery

ORDERING

Orders can be placed with our sales team up until 5:30pm Monday to Thursday and 5:00pm Friday, with next day delivery for off the shelf items available up until these times. We have made sure that ordering is as easy as possible with the multiple options available to you:



By Telephone

Orders can be placed over the phone with our experienced sales team on +44 (0) 121 351 4445



By Fax

Orders can be recieved by fax through to our Freefax line 0800 085 2984, or +44 (0) 121 351 4442



By Email

Email your order to our sales team at sales@centretank.com for quick and easy order placement



Online

You can place orders on our website www.centretank.com by entering your account number at the checkout

DELIVERY & COLLECTIONS

Please refer to our shipping table for an easy guide to what carriage services are available to you. If you are in the area, let us know in advance and we will have your goods ready for collection from our trade counter. Our trade counter opening hours are 8:00am-5:30pm Monday to Thursday and 8:00am-5:00pm Friday.

| Carriage Type | UK Mainland (exc. Highlands & Isles) | Highlands & Offshore Islands | Northern Ireland | Southern Ireland | Europe | Rest of World |
|------------------------------|--|---|------------------------------|----------------------------|---------------------|------------------|
| Next Day - Up to 5.30pm | £15.50 | | £15.50 | £25.00 | | |
| Next Day - Before 12.00am | £19.00 | | | | | |
| Next Day - Before 10.30am | £23.00 | | | | | |
| 2-3 Day - Up to 5.30pm | £9.50 (FOC Over £300 Net) | £15.50 (2 Day Highlands) (2-5 Day Scottish Islands) | £9.50 (FOC Over £500 Net) | £11.95 | P.O.A (Zone A*) | |
| 3-6 Day - Up to 5.30pm | | | | | P.O.A (Zone B**) | |
| Saturday - Up to 12.30pm | £28.00 | | | | | |
| Post (3-4 Day) | £5.50 (Up to £10 Value) | £5.50 (Up to £10 Value) | £5.50 (Up to £10 Value) | £5.50 (Up to £10 Value) | | |
| Contact Us | | | | | | P.O.A |

* Zone A - Austria, Belgium, Denmark, France (Inc Monaco), Germany, Liechtenstein, Luxembourg, Netherlands, Switzerland

** Zone B - Bosnia-Herzegovina, Bulgaria, Croatia, Czech Republic, Estonia, Finland, Greece, Hungary, Iceland, Italy, Latvia, Lithuania, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden

ALSO IN OUR PRODUCT RANGE

Fluid & fuel dispensing products:

- ✓ Simple hand pumps & electric fuel dispensers
- ✓ Automatic & manual refuelling nozzles
- ✓ Flow meters, filters & delivery hoses



Storage tank accessories:

- ✓ Tank gauges & level alarms
- ✓ Fill point caps & vent equipment
- ✓ Valves & fittings



Oil heating equipment:

- ✓ Fire valves & brass fittings
- ✓ Oil tank level gauges
- ✓ Heating oil lines & meters



AdBlue® Handling

- ✓ Transfer pumps for drums, IBCs & tanks
- ✓ Automatic & manual refuelling nozzles
- ✓ Gauges, flow meters & delivery hoses



PLEASE CONTACT US FOR MORE INFORMATION

We are happy to help....

Centre Tank Services Ltd


Unit 41 Minworth Industrial Park
Forge Lane, Minworth
Sutton Coldfield
West Midlands B76 1AH


Tel: +44 (0) 121 351 4445

Fax: +44 (0) 121 351 4442

Email: enquiries@centretank.com

www.centretank.com

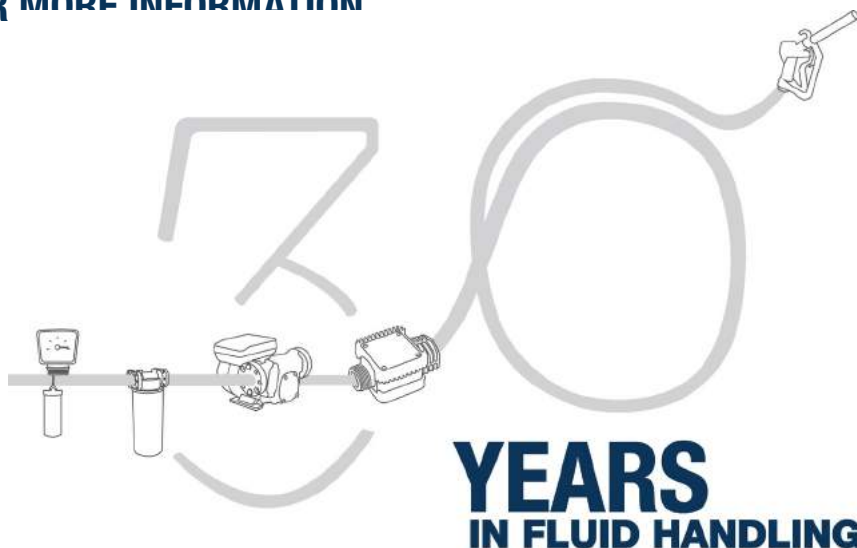

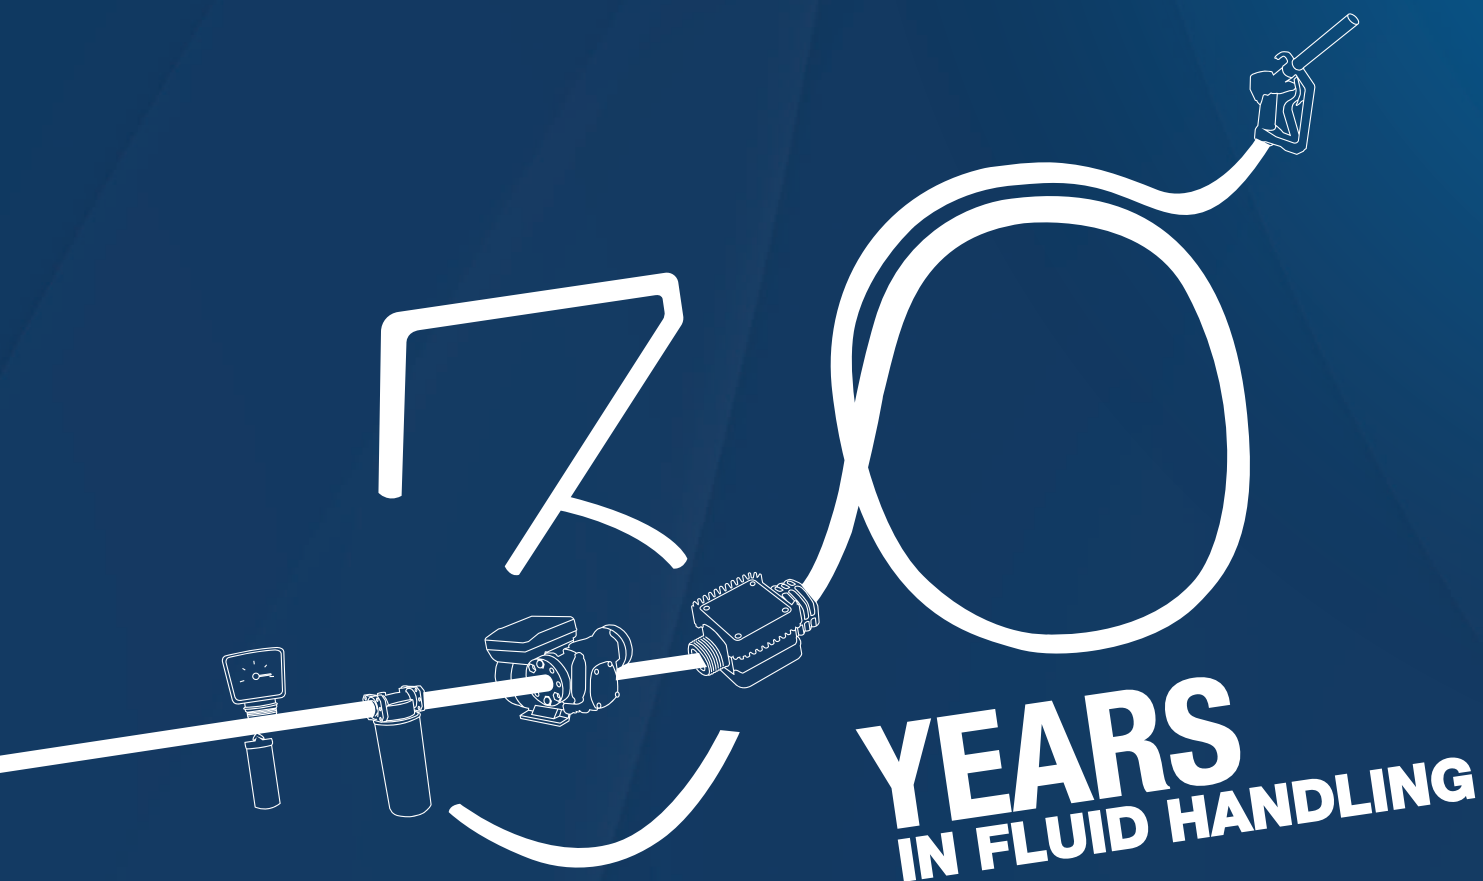

YEARS
IN FLUID HANDLING



Butts of Bawtry

Station Yard Bawtry Doncaster South Yorks DN10 6QD UK

Tel: 0044 (0)1302 710868 Fax: 0044 (0)1302 719481

Web: www.buttsofbawtry.com Email: info@buttsofbawtry.com