


SA
SUPALIGN

***PREMIUM
RANGE***

ST722 - ST722/24

AUTOMATIC TYRE CHANGERS



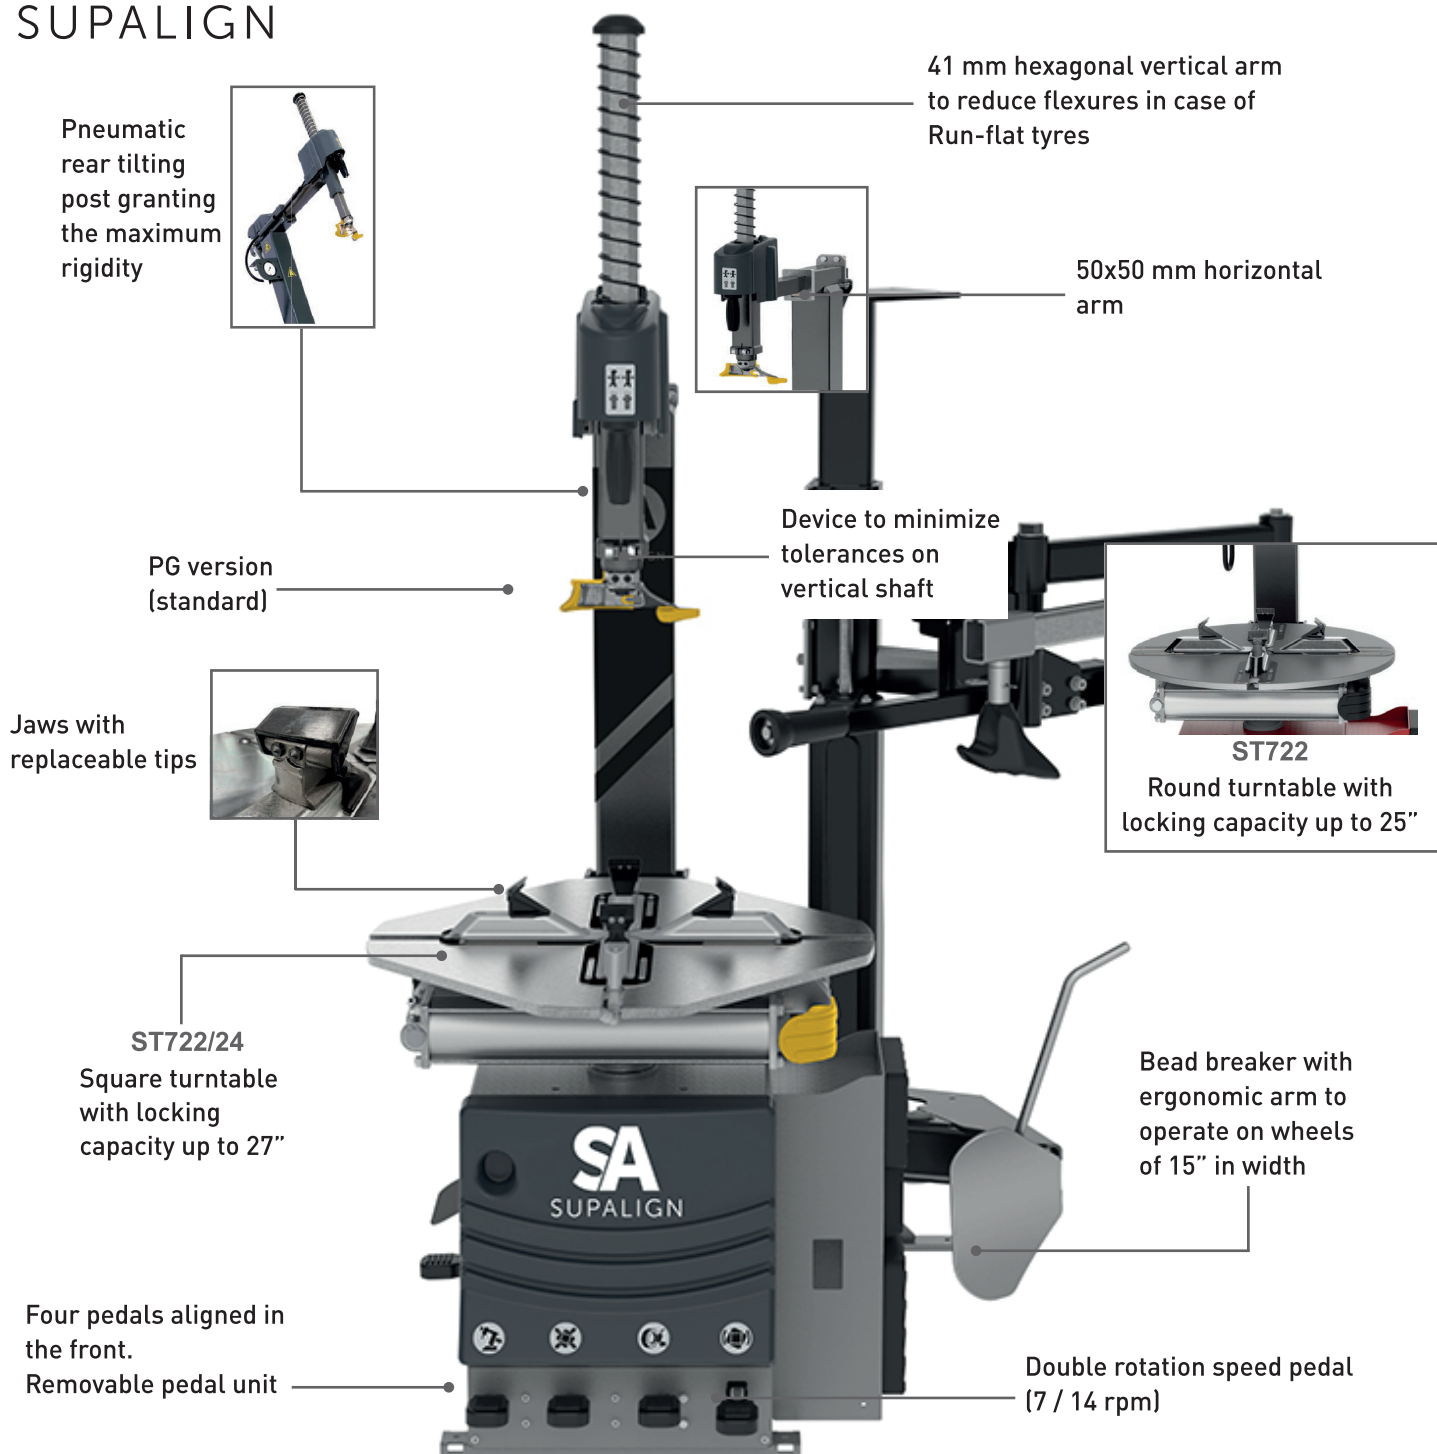

TECHNICAL DATA

											
ST722	260 kg	10" ÷ 22"	12" - 25"	15"	46" 1160 mm	All tyres	1.500 kg	Standard			8 - 12 bar
								400V/3/50-60 Hz	7 / 14 rpm	0,8 - 1,1	
								On request			
								Motoinverter 230V/1/50-60 Hz	0 - 16 rpm	1,5	
								230V/3/50-60 Hz	7 / 14 rpm	0,8 - 1,1	
ST722/24	265 kg	10" ÷ 24"	12" - 27"					110V/1/60 Hz	7 rpm	0,75	

STANDARD CONFIGURATION



Rear head protection (x1)



Front head protection (x2)



Lever

OPTIONAL ACCESSORIES

Tecnohelp	Tecnolight	Helper group	Helper arm	Kit IT Tubeless	Mounting clamp RFT/UHP
Rear head protection	Front head protection	Slide guard kit (4 pcs)	Rim breaker blade protection	Lever plastic protection	Plastic M/D tool
Quick change M/D tool	Kit moto (4 pcs)	Kit scooter (4 pcs)	Roller board	Wheel lift	


ST722

Equipped with Assistor Arm and Helper Arm



OVERALL DIMENSIONS

ST722/24

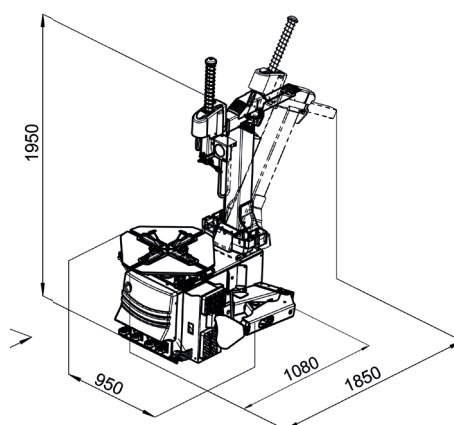

01302 710868
www.supalign.co.uk